


WAVELINK

Flat Flexible Cable

Cable Specifications:

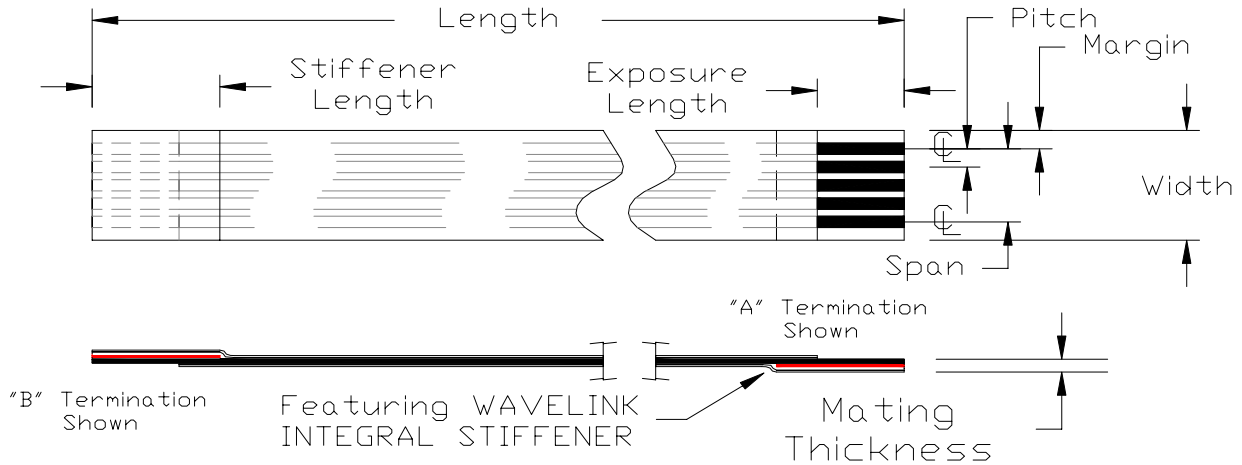


Standard Dimensions:

| Pitch (mm) | Tolerance non-cumulative (mm) | (n) # of Conductors | Standard Jumpers | | | ZIF / LIF Jumpers | | |
|------------------|-------------------------------|---------------------|---|-----------------------|--------------|----------------------------------|-----------------------------------|-------------------------------------|
| | | | Span (mm) (+/- 0.08) | Width (mm) (+/- 0.05) | *Margin (mm) | **Exposure Length (mm) (+/- 0.5) | **Stiffener Length (mm) (+/- 0.8) | ***Mating Thickness (mm) (+/- 0.05) |
| 2.54 | +/- 0.13 | 1 - 75 | 2.54*(n-1) | 2.54*(n+1) | +/- 0.13 | 5.0 | 6.0 | 0.30 |
| 1.27 | +/- 0.13 | 1 - 110 | 1.27*(n-1) | 1.27*(n+1) | +/- 0.13 | 5.0 | 6.0 | 0.30 |
| 1.25 | +/- 0.13 | 1 - 110 | 1.25*(n-1) | 1.25*(n+1) | +/- 0.13 | 5.0 | 6.0 | 0.30 |
| 1.00 | +/- 0.08 | 1 - 110 | 1.00*(n-1) | 1.00*(n+1) | +/- 0.08 | 4.0 | 6.0 | 0.30 |
| 0.50 | +/- 0.08 | 1 - 110 | 0.50*(n-1) | 0.50*(n+1) | +/- 0.08 | 4.0 | 6.0 | 0.30 |
| Length Tolerance | 0 - 300 mm | +/- 0.8 mm | * Margin = Pitch = center of conductor to cable edge ** Exposure and Stiffener Length can be customized as needed *** Mating thickness may vary by connector manufacturer | | | | | |
| | 301 - 500 mm | +/- 1.27 mm | | | | | | |
| | > 500 mm | +/- 2.54 mm | | | | | | |

Part Numbering:

050 - 020 - 0300 - A B

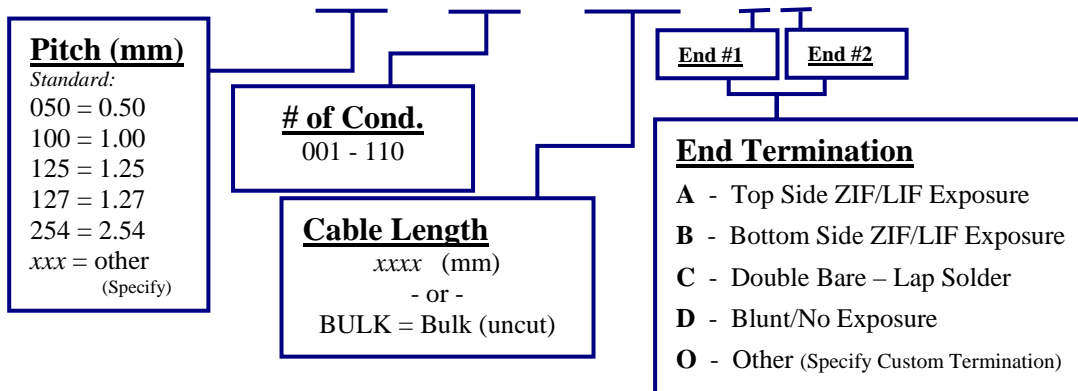

Regional Offices:

Glenn Manchester
26 Shelly Drive
Derry, NH 03038
Tel: (603) 216-5401

Joe DiPalermo
39 Peabody Rd.
Brentwood, NH 03833
Tel: (603) 347-1653

Steve Ellsworth
1 Nadia Court
Smithtown, NY 11787
Tel: (631) 360-2158

Mark Pare
8 Ermer Road
Derry, NH 03038
Tel: (603) 437-0436

gmanchester@picasales.com jdipalermo@picasales.com sellsworth@picasales.com mpare@picasales.com